

texdecor

Acoustic and decorative solutions




ACOUSTIC
WALLCOVERING

SlimWall Curves



B-s2, d0



αW 0.25
NRC 0.35




SlimWall Curves Pulse, SLWC 9329 04 05



Pulse ref. SLWC 9329

Kit of 2 panels

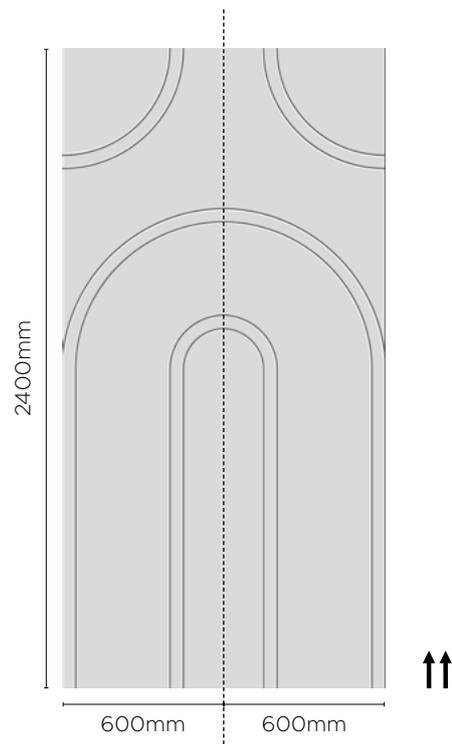




SlimWall Curves Loop, SLWC 9328 04 92



Loop ref. SLWC 9328

Kit of 2 similar panels

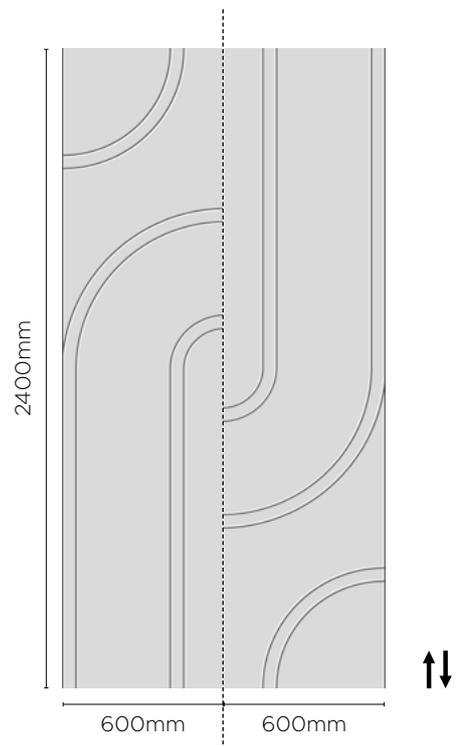




SlimWall Curves Slide, SLWC 9331 04 21




Slide ref. SLWC 9331

Kit of 2 similar panels

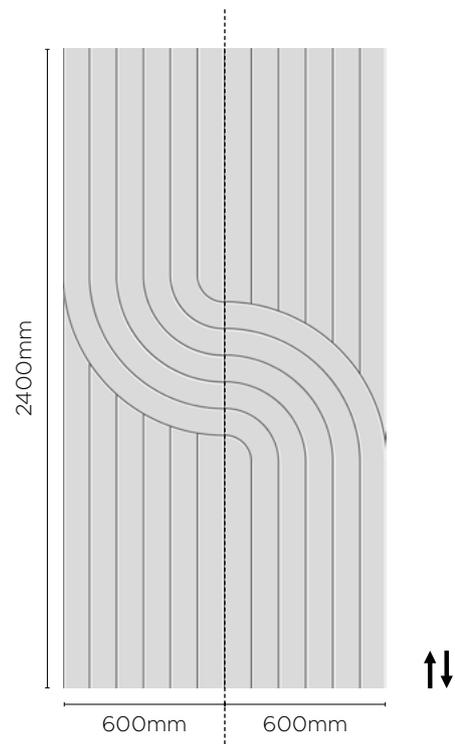




SlimWall Curves Rainbow, SLWC 9330 05 76

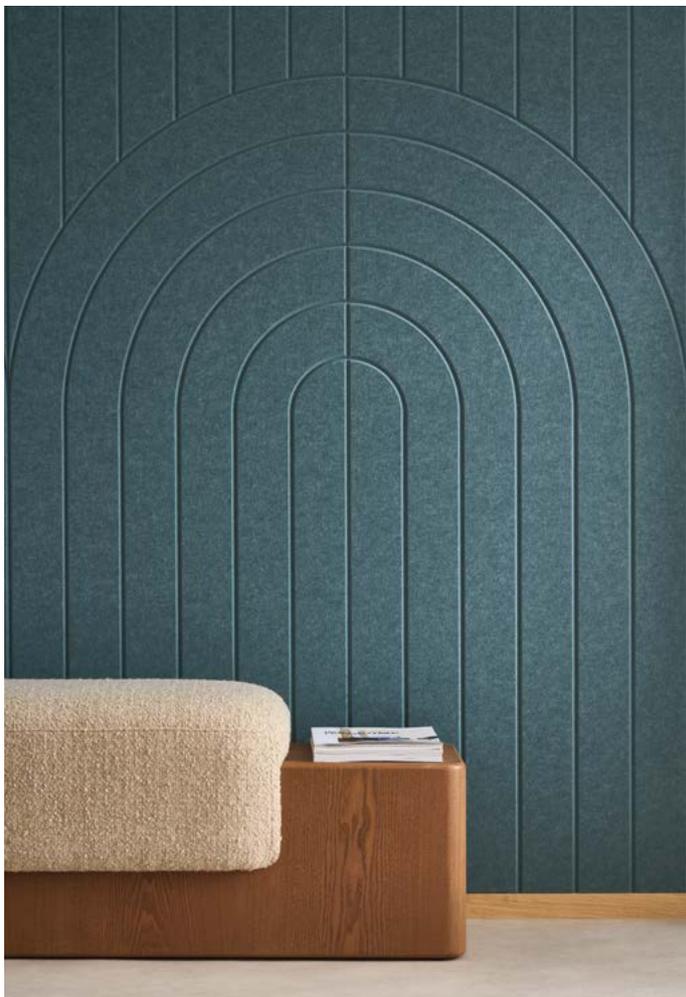


Rainbow ref. SLWC 9330

Kit of 2 panels

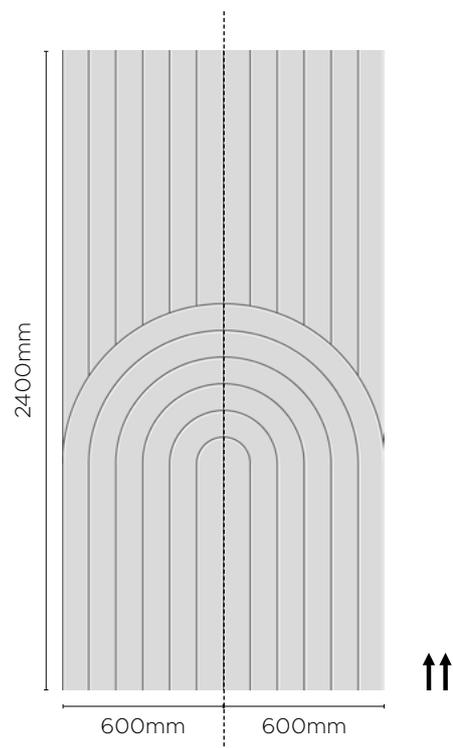




SlimWall Curves Nest, SLWC 9327 13 05

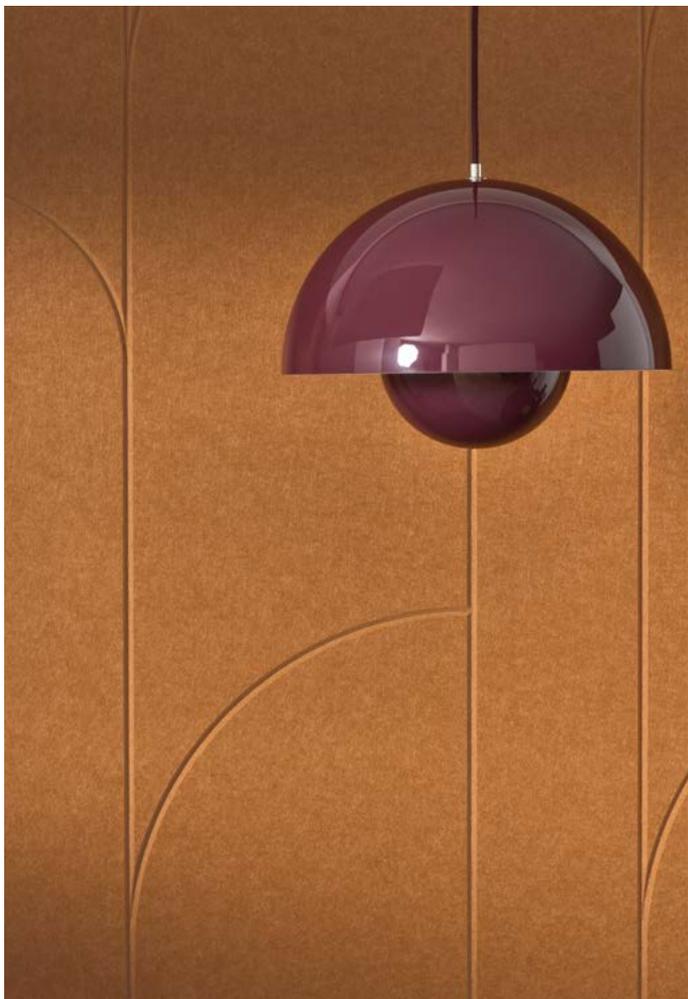

Nest ref. SLWC 9327

Kit of 2 similar panels

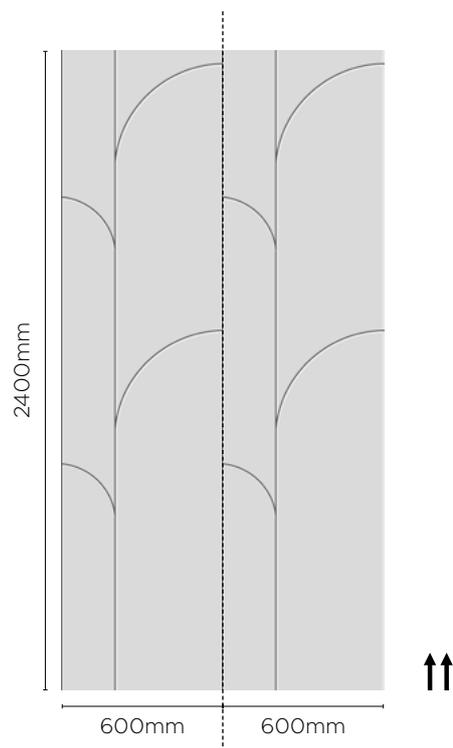




SlimWall Curves Flow, SLWC 9326 02 44

Flow ref. SLWC 9326

Kit of 2 similar panels

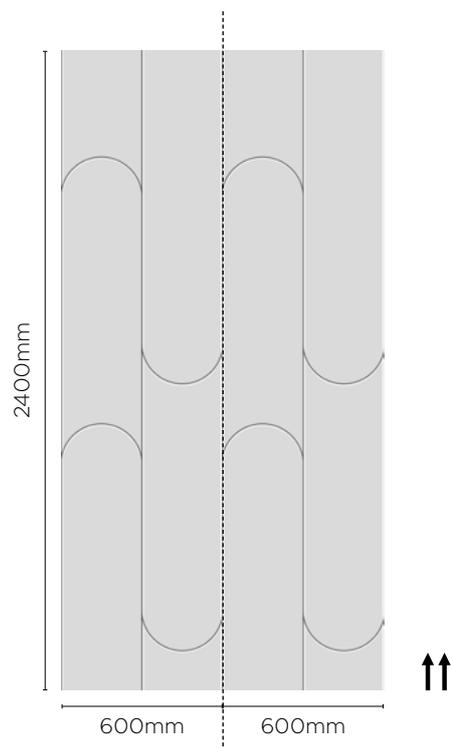




SlimWall Curves Tide, SLWC 9332 10 72

Tide ref. SLWC 9332

Kit of 2 panels

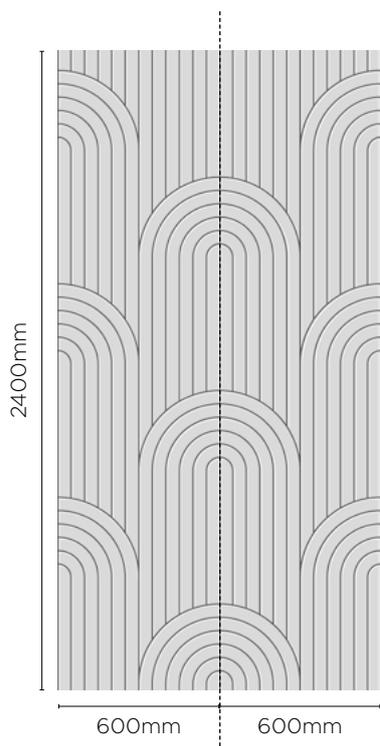







Colours



Installation

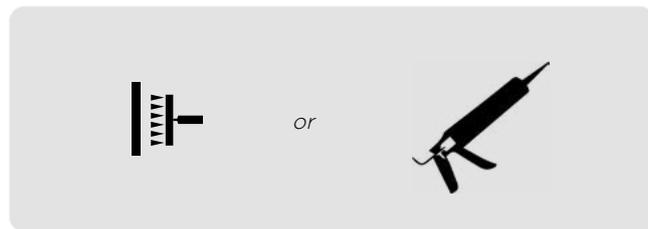

Ecoconception

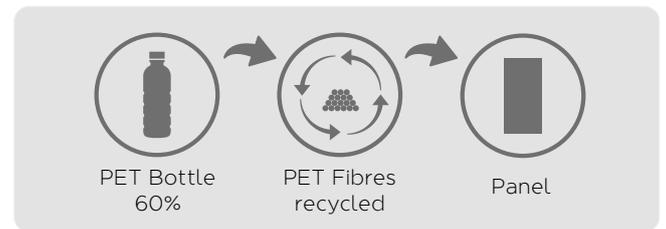

Acoustic / PET 9 mm

Frequencies (Hz)	125	250	500	1000	2000	4000	α_w	NRC
SlimWall Curves Support béton / concrete substrate	0,04	0,08	0,13	0,34	0,63	0,94	0.25	0.30
SlimWall Curves Support BA13 / BA13 Plasterboard / Cartón-yeso BA13	0,02	0,05	0,2	0,45	0,7	0,93	0.25 H	0.35

Caractéristiques - Description - Características

Matériau - Composition - Material	Feutre compact - Compact felt - Feltro compacto 100% de fibre polyester non feu - 100% fire-resistant polyester fibre - 100% fibras de poliéster ignífugo	 <p>Retrouvez toutes les informations Find more information Encuentra toda la información</p>
Poids - Weight - Peso	1,9 kg/m ²	
Epaisseur - Thickness - Grosor	9 mm	
COV - VOC - COV	A+	
Résistance en milieu chloré (cotation sur 5) - Resistance in chlorinated environment (rating out of 5) - Resistencia en ambiente clorado (calificación de 5)	5 (NF EN ISO 105-N01)	
Lavabilité - Cleaning - Mantenimiento	Aspirateur - Vacuum - Aspiradora Chiffon humide - Damp cloth - Trapo húmedo Double face - Double-sided - Cinta adhesiva doble cara	
Réaction au feu - Flammability - Reacción al fuego	Euroclass B s2 d0	



texdecor

2 rue d'Hem, 59780 Willems
Tel : + 33 (0)3 20 61 78 37
www.texdecor.com

Publication : 04.2026
TEXSLWCBROCUR