



texdecor

Acoustic and decorative solutions





ACOUSTIC
WALLCOVERING

SlimWall Rythm







Allegro ref. SLIW 9308


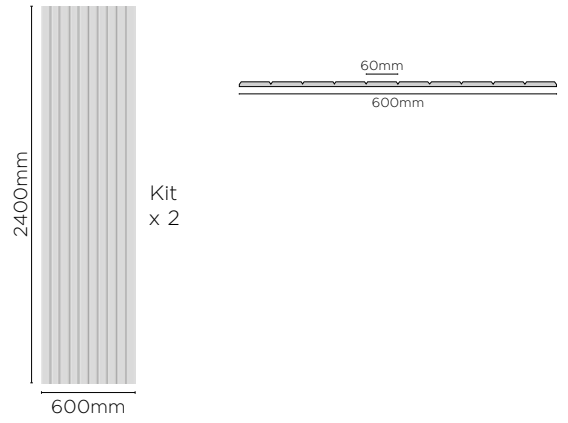


Moderato ref. SLIW 9309

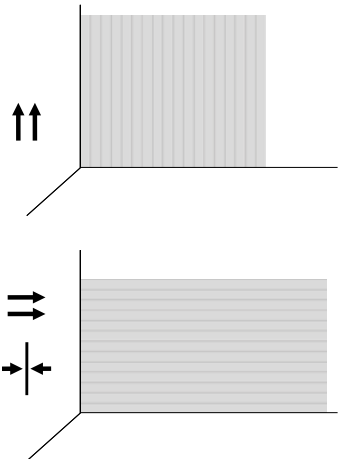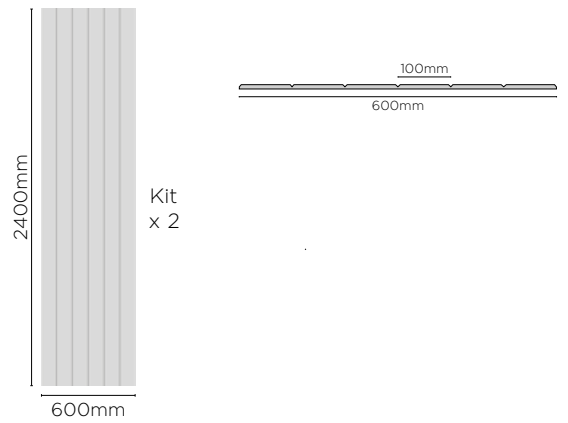




Presto ref. SLIW 9310

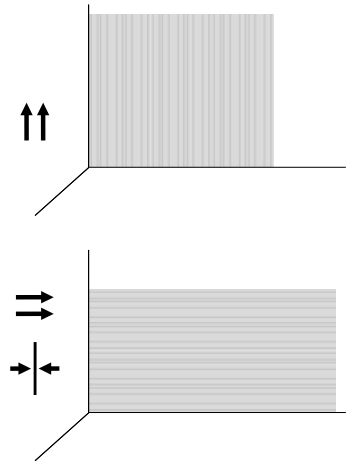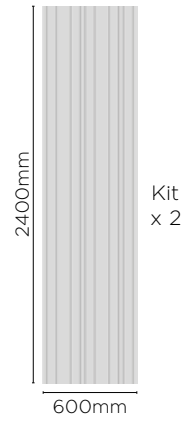


Adagio ref. SLIW 9311

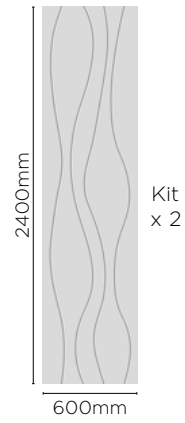


Colours



Installation

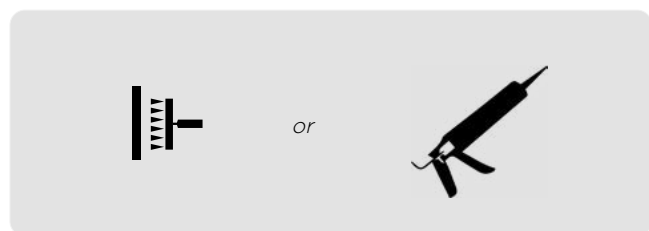

Ecoconception

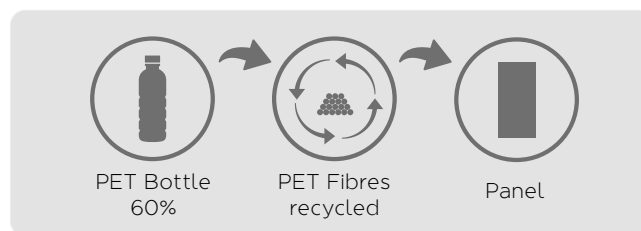

Acoustic / PET 9 mm

Frequencies (Hz)	125	250	500	1000	2000	4000	α_w	NRC
SlimWall Rythm Support béton / concrete substrate	0,04	0,08	0,13	0,34	0,63	0,94	0.25	0.30
SlimWall Rythm Support BA13 / BA13 Plasterboard / Cartón-yeso BA13	0,02	0,05	0,2	0,45	0,7	0,93	0.25 H	0.35

Caractéristiques - Description - Características

Matériau - Composition - Material	Feutre compact - Compact felt - Feltro compacto 100% de fibre polyester non feu - 100% fire-resistant polyester fibre - 100% fibras de poliéster ignífugo	<p>Retrouvez toutes les informations Find more information Encuentra toda la información</p>
Poids - Weight - Peso	1,9 kg/m ²	
Epaisseur - Thickness - Grosor	9 mm	
COV - VOC - COV	A+	
Résistance en milieu chloré (cotation sur 5) - Resistance in chlorinated environment (rating out of 5) - Resistencia en ambiente clorado (calificación de 5)	5 (NF EN ISO 105-N01)	
Lavabilité - Cleaning - Mantenimiento	Aspirateur - Vacuum - Aspiradora Chiffon humide - Damp cloth - Trapo húmedo Double face - Double-sided - Cinta adhesiva doble cara	
Réaction au feu - Flammability - Reacción al fuego	Euroclass B s2 d0	