



Acoustic Panel – SLIMWALL CURVES

Description / Composition


Type	Acoustic panel made of compact PET felt
Composition	PET / 60% recycled plastic bottle content
Thickness	9 mm
Format	2 panel 2400 x 600 mm
Weight	2 kg/m ²
Color options	SlimColor color chart
Installation	Installation glued to the wall and ceiling
Design	

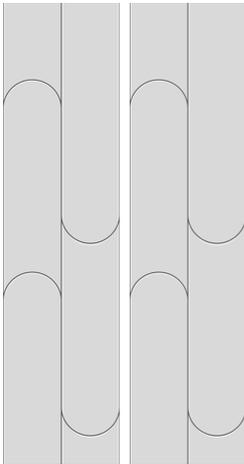


SLWC9326 Flow [Slimcolor](#)

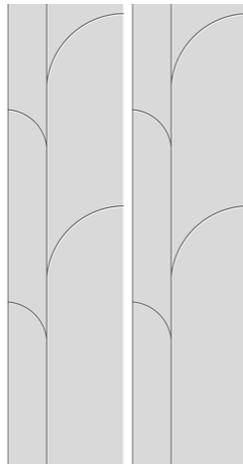


SLWC9327 Nest [Slimcolor](#)

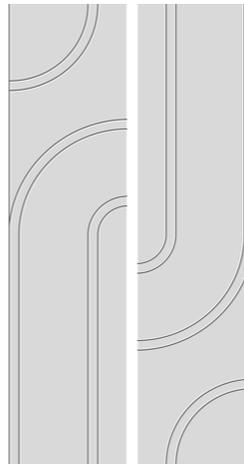


SLWC9328 Loop [Slimcolor](#)

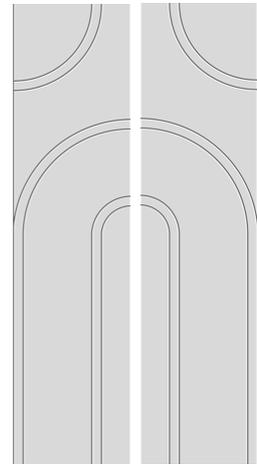


SLWC9329 Pulse [Slimcolor](#)

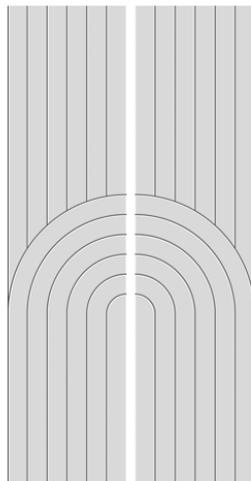

SLWC9330 Rainbow [Slimcolor](#)

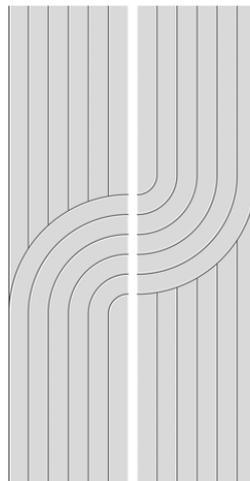

SLWC9331 Slide [Slimcolor](#)

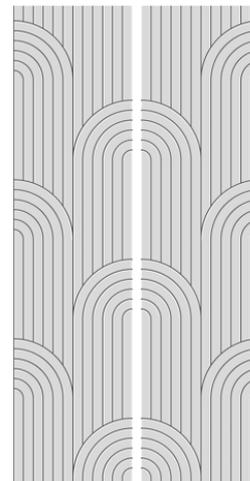

SLWC9332 Tide [Slimcolor](#)

Regulations / Environment

Fire resistance	B s2 d0 / Class A	EN13501 - 1/ASTM E-84
Acoustic absorption	alpha w 0.25 on BA13 alpha w 0.25 on concrete	Norme EN 20 354
Lightfastness	4/7 grey scale	NF EN ISO 105- N01
Bleach fastness	5/5 grey scale	NF EN ISO 105- B02
C.O.V.	A +	ISO 16000
CE	DOP-CPR-SWPK-130	Norme EN 15 102
Maintenance	Vacuum cleaner / damp cloth / double-sided tape	
Certification	Oeko-Tex Std 100	
Recycled content	62% recycled plastic bottle content	

Packaging

Sale by pack	Pack of 2 panels 2400 x 600 mm 2.88 m ² / weight of 1 pack +/- 6 kg	
Cardboard dimension	2400 x 600 x 70 mm	Label FSC

Installation

Glue	Wall : Ovalit TM (Metylan - Henkel) or Patex PL 100
Fixing	Ceiling : Ovalit P (Metylan - Henkel) according to the installation instructions
Quantity of glue	On the wall using a roller or with rope on the back of the panel
Joint	According to the installation instructions
Instructions	Edge to edge www.texdecor.com
