


texdecor

Acoustic and decorative solutions



ACOUSTIC
SOLUTIONS



SlimUp






Installation

Elingues / Slings / Eslingas

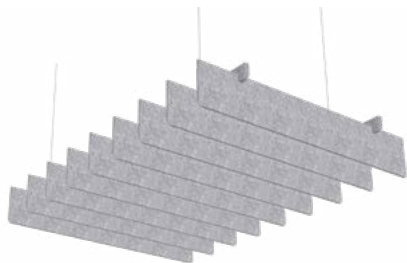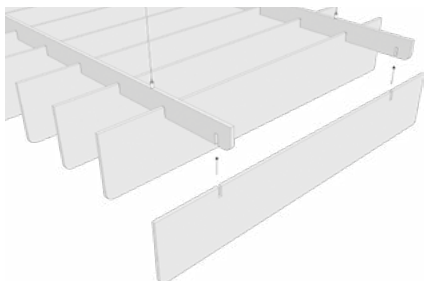


Pose rail en T/ T-Rail installation / Instalación con riel en T

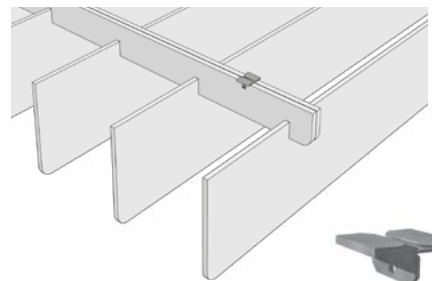


clip 3


SlimUp 1200

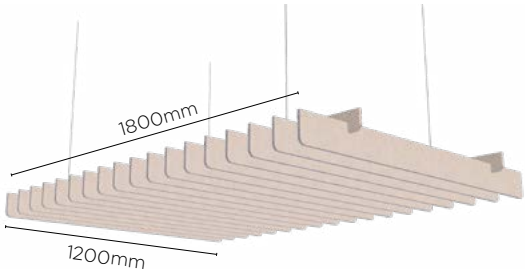


18 pieces 1200x100mm

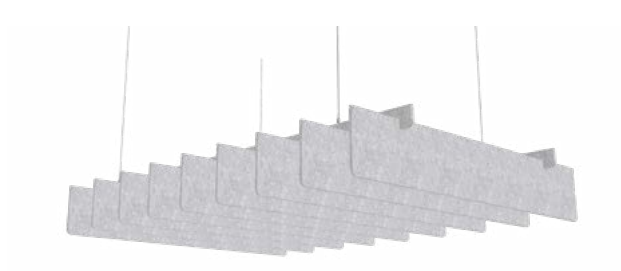

9 pieces 1200x200mm

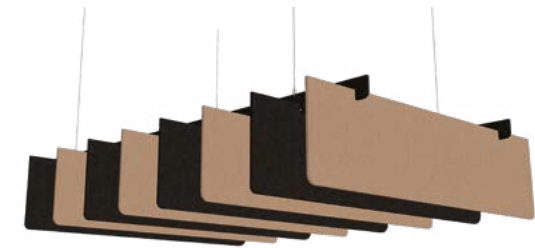


8 pieces 1200x300mm

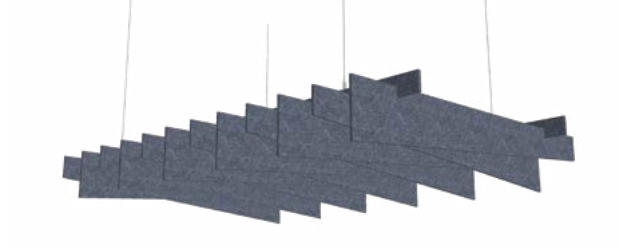


12 pieces trapeze 1200


SlimUp 2400

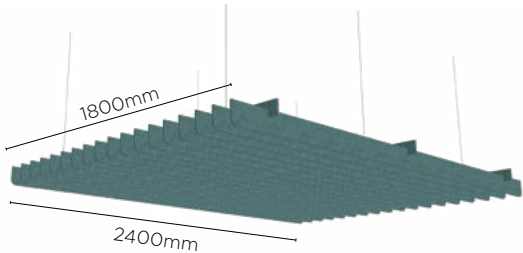


18 pieces 2400x100mm

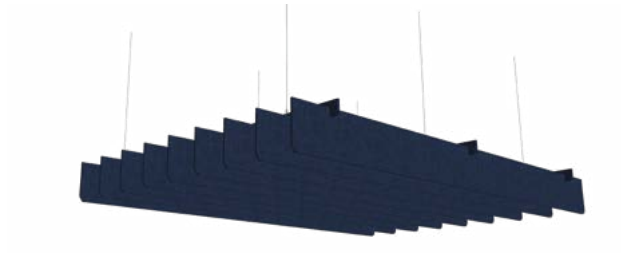

9 pieces 2400x200mm


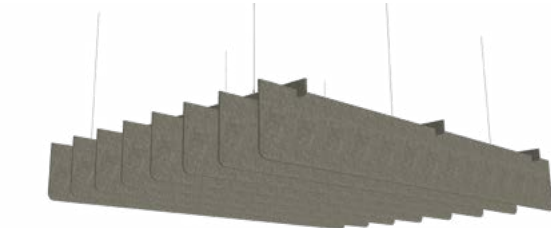


8 pieces 2400x300mm

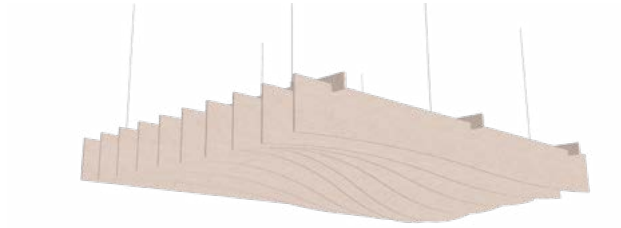


10 pieces wave 2400mm

Plaqué au plafond / Fixed to the ceiling / Fijado al techo

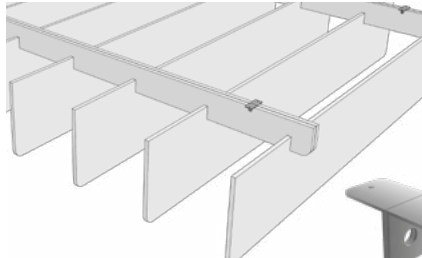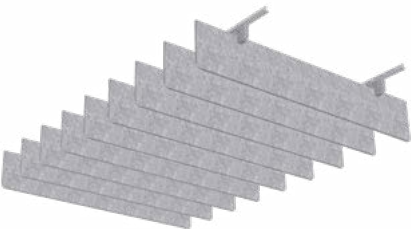


clip 4

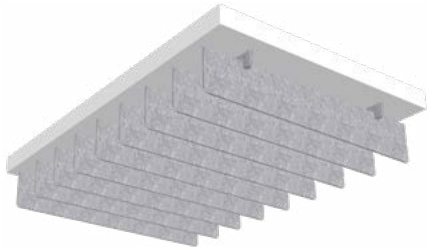

Colours




Ecoconception

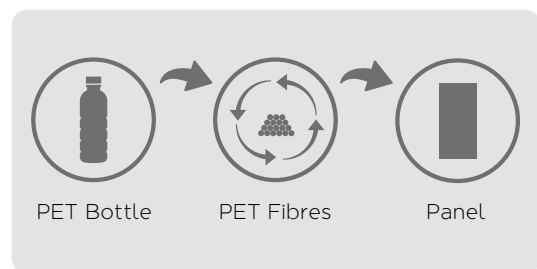

Acoustic / PET 9 mm

Frequencies (Hz)	125	250	500	1000	2000	4000	AEQ
SlimUp 1200x100	0,2	0,2	0,8	1,4	1,9	2,7	1,37
SlimUp 1200x200	0,3	0,4	1	1,5	2,1	2,8	1,53
SlimUp 1200x300	0,3	0,8	1,1	1,6	2,3	2,8	1,67
SlimUp Trapeze 1200	0,2	0,4	0,9	1,4	2,1	2,8	1,47
SlimUp 2400x100	0,4	0,4	1,6	2,8	3,8	5,4	2,73
SlimUp 2400x200	0,6	0,8	2	3	4,2	5,6	3,07
SlimUp 2400x300	0,6	1,6	2,2	3,2	4,6	5,6	3,33
SlimUp Wave	0,5	0,9	1,9	3	4,2	5,5	3,03

Caractéristiques - Description - Características

Matériau - Composition - Material	Feutre compact - Compact felt - Feltro compacto 100% de fibre polyester non feu - 100% fire-resistant polyester fibre - 100% fibras de poliéster ignífugo	 <p>Retrouvez toutes les informations Find more information Encuentra toda la información</p>
Poids - Weight - Peso	1,9 kg/m ²	
Epaisseur - Thickness - Grosor	9 mm	
COV - VOC - COV	A+	
Résistance en milieu chloré (cotation sur 5) - Resistance in chlorinated environment (rating out of 5) - Resistencia en ambiente clorado (calificación de 5)	5 (NF EN ISO 105-N01)	
Lavabilité - Cleaning - Mantenimiento	Aspirateur - Vacuum - Aspiradora Chiffon humide - Damp cloth - Trapo húmedo Double face - Double-sided - Cinta adhesiva doble cara	
Réaction au feu - Flammability - Reacción al fuego	Euroclass B s2 d0	

texdecor